


PortServer® TS H MEI

Device Server Hardened Series



The PortServer TS H MEI family of device servers delivers high-performance serial-to-Ethernet connectivity and is designed specifically for environments that require extended operating ambients of -35° C to +74° C, such as traffic management, utilities, pipelines and other remote applications.

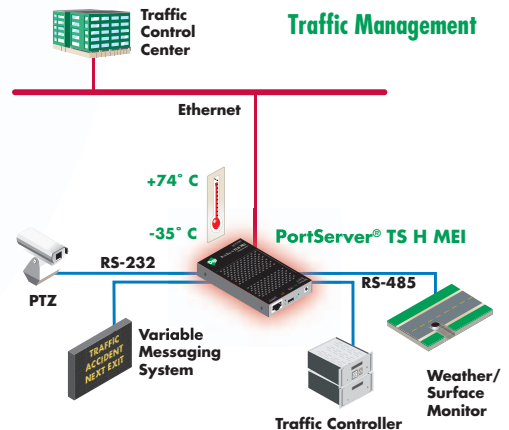

Features/Benefits

- > Robust, hardened model with extended temperature range of -35° C to +74° C
- > Easily network-enable virtually any serial device
- > RS-232/422/485 switch selectable on all ports
- > Patented Digi RealPort® technology for COM or TTY port control and management
- > Monitoring and diagnostic utility for simple and efficient device monitoring and troubleshooting
- > Data security via SSH v2 and SSL/TLS
- > Port buffering for data capture
- > Easy configuration through web interface (HTTP)
- > Industry leading low latency
- > 9-30VDC power with bare-wire "pigtail" for direct connection
- > Locking barrel connector

Overview

The PortServer TS H MEI Hardened Series makes it easy to connect one to four serial devices to your network, even in locations requiring extended operating ambient temperatures. It combines the inherent benefits of data networking with proven asynchronous connectivity to deliver powerful yet simple Ethernet connectivity for all your serial devices.

Part of Digi's broad device server offering, PortServer TS H MEI delivers universal, high-performance serial-to-Ethernet connectivity and is ideal for applications requiring COM ports, serial tunneling, or where TCP Socket, UDP Socket or UDP Multicast functionality is needed. RealPort technology makes it possible to establish a connection between the host and networked serial device by creating a local COM or TTY port on the host computer, allowing software applications to work with networked device servers.

PortServer TS H MEI also delivers powerful features such as data security via SSH v2, SSL/TLS, port buffering and full SNMP management. For added flexibility, it is available in one-, two- and four-port versions, with RS-232/422/485 switch-selectable on all ports.

PortServer TS H MEI is easy to install locally or remotely through a variety of IP addressing methods (DHCP, RARP, ARP-Ping) along with an application (included on the installation CD) that will automatically detect all Digi devices on your network. Also included is a quick-start guide that makes configuration of the product hassle-free.

Digi International makes device networking easy by developing products and technologies that are cost-effective and easy to use. With over 20 million ports shipped worldwide, Digi has been offering the highest levels of performance, flexibility, and quality since 1985.



Features/Specifications

FEATURES

- 10/100Base-T Ethernet support
- RJ-45 serial port
- RS-232/422/485 switch selectable
- Baud rates up to 230 Kbps
- Full modem and hardware flow control
- Low latency
- TCP/UDP Socket Services
- UDP Multicast
- Telnet and Reverse Telnet
- Patented RealPort technology for COM and TTY ports
- PPP
- SSH v2 server
- SSL/TLS
- Port buffering
- Modbus to Modbus/TCP conversion
- HTTP
- SNMP (read/write)
- Digi Port Authority – Remote management diagnostics and auto-discovery tool
- DHCP/RARP/ARP-Ping for IP address assignment
- 9-30VDC input
- LED status for link and power
- RJ-45/DB-9F crossover cable included for configuration
- Bare-wire "pigtail" power connector
- Locking barrel power connector

OPERATING SYSTEMS

- AIX 32 & 64 – encrypted
- HP-UX
- Linux – encrypted
- Windows® 98, ME
- Windows XP
- Windows Server™ 2003
- Windows 2000
- Windows NT® 4.0
- SCO® OpenServer™ – encrypted
- SCO UnixWare™
- Solaris™ (Intel)
- Solaris (SPARC)
- TCP/UDP Socket Services are operating system independent



REGULATORY APPROVALS

- FCC Part 15, A
- CE
- EN55024
- EN55022, Class A
- UL/CUL60950
- IEC60950 & CB
- AS/NZS 3548
- VCCI V-3/99 .05

POWER REQUIREMENTS




- 9-30VDC @ 0.5 Amps max, extended temp power supply available

DIMENSIONS

- Length: 5.25 in (13.31 cm)
- Width: 3.33 in (8.46 cm)
- Depth: 0.95 in (2.42 cm)
- Weight: 2.25 oz (64.00 g)

ENVIRONMENTAL

- Operating temperature: -35° C to +74° C (-31° F to +165° F)
- Relative Humidity: 5% to 90% (non-condensing)
- Ethernet isolation: 1500VAC min per IEEE 802.3/ANSI +3.263
- Serial port protection (ESD): +15 kV air GAP and +8 kV contact discharge per IEC 100-4-2

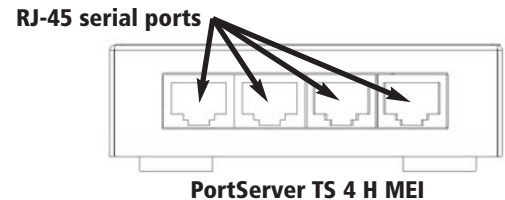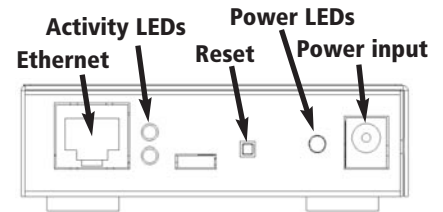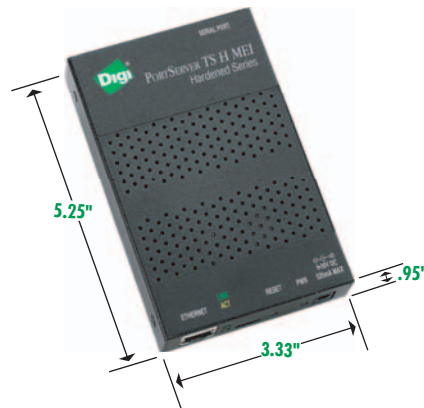

MODEL.....PART NUMBERS

Model	North America	International
PortServer TS 1 H MEI	70001917	70001917
PortServer TS 2 H MEI	70001918	70001918
PortServer TS 4 H MEI	70001919	70001919
Extended Temperature Power Supply	76000717	76000717

DIGI SERVICE AND SUPPORT

You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. <http://support.digi.com>

Digi International
11001 Bren Road E.
Minnetonka, MN 55343 USA
PH: 877-912-3444
952-912-3444
FX: 952-912-4952
Email: info@digi.com
www.digi.com

Digi International GmbH
Joseph-von-Fraunhofer Str. 23
D-44227 Dortmund
Germany
PH: +49-231-9747-0
FX: +49-231-9747-111
www.digi.de

Digi International (HK) Limited
Suite 1703-05, 17/F.,
K Wah Centre
191 Java Road
North Point, Hong Kong
PH: +852-2833-1008
FX: +852-2572-9989
www.digi.cn

www.digi.com

email:
info@digi.com



© 2003-2005 Digi International Inc. Digi, Digi International, the Digi logo, the Making Device Networking Easy logo, RealPort and PortServer are trademarks or registered trademarks of Digi International, Inc. in the United States and other countries worldwide. Microsoft, Windows and the Windows logo are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners.

91001210
C1/1005