


PortServer TS 8 and PortServer TS 16 deliver reliable and cost-effective RS-232/422/485 serial-to-Ethernet connectivity, with a robust feature set for efficient device management.

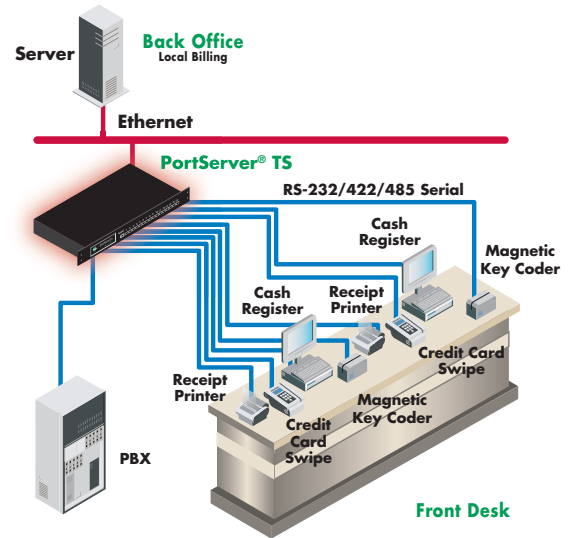

Features/Benefits

- Cost-effective eight- or 16-port RS-232/422/485 serial-to-network connectivity
- SSHv2 ensures encrypted connections
- RealPort with encryption provides local serial port functionality and SSL-based protection for additional security
- Ports may be shared between multiple hosts running different operating systems
- Supports SNMP for easy network management
- Supports RADIUS authentication and accounting
- NEBS Level III certified in a system

Overview

The PortServer TS family of serial servers delivers intelligent, reliable and cost-effective RS-232/422/485 serial-to-Ethernet connectivity. PortServer TS 8 (8 serial ports) and PortServer TS 16 (16 serial ports) support data center console port management applications, as well as property management, point-of-sale, data acquisition, industrial automation, power utilities, travel reservations and other applications requiring serial-to-IP connectivity.

PortServer TS solutions offer the most robust feature set on the market. Digi's patented RealPort® technology makes it possible to establish a connection between the host and a networked serial device by creating a local COM or TTY port on the host computer, allowing existing software applications to work without modification. Incoming/outgoing Rlogin and Telnet sessions on each port give equipment and system administrators a high level of control over networked serial devices. Other features include Secure Shell (SSHv2) encryption to protect against unauthorized network monitoring or "sniffing," and port buffering, which allows network administrators to easily capture vital information for troubleshooting.

A variety of management tools are supplied with the PortServer TS product family, including Digi Port Authority-Remote and the Digi web management console. Functions including IP assignment, diagnostics and guided configuration make the product easy to install and use.

Features/Specifications

FEATURES

- 10/100 Mbps Ethernet
- RS-232 serial ports; MEI versions have software selectable RS-232/422/485 ports
- 8 or 16 ports
- DHCP, RARP and ARP-Ping
- HTTP for easy browser configuration
- Telnet, Reverse Telnet, Rlogin and auto-connect
- Up to 9 Telnet or Rlogin sessions per port
- TCP and UDP Socket support
- Password access
- PPP (PAP & CHAP)
- Line Printer Daemon (LPD)
- SNMP (read and write)
- DPA-Remote for easy monitoring
- Easy firmware upgrades via TFTP
- Save/Restore configuration to host
- 230 Kbps throughput on all ports
- Full modem and hardware flow control
- RADIUS
- SSHv2 available on all ports simultaneously
- Port buffering up to 64 Kbps per port
- Select models include mounting brackets
- Rack-mountable unit with all power/serial connectors on front panel (PortServer TS 16 Enterprise only)

OPERATING SYSTEMS

- AIX
- HP-UX
- Linux
- Windows® XP, Windows 2000, Windows Server™ 2003, Windows 98, Windows ME, Windows NT®
- NCR UNIX MP-RAS
- SCO® OpenServer™
- SCO UnixWare™
- Solaris™ (Intel)
- Solaris (SPARC)

DIMENSIONS

- PortServer TS 8**
- Length: 8.30 in (21.08 cm)
 - Width: 3.70 in (9.40 cm)
 - Depth: 1.00 in (2.54 cm)
 - Weight: 3.05 lbs (1.39 kg)

- PortServer TS 16**
- Length: 13.40 in (34.04 cm)
 - Width: 6.60 in (16.76 cm)
 - Depth: 1.40 in (3.60 cm)
 - Weight: 5.30 lbs (2.40 kg)

- PortServer TS 16 Rack, PortServer TS 8/16 MEI**
- Length: 16.80 in (42.70 cm)
 - Width: 6.60 in (16.76 cm)
 - Depth: 1.60 in (4.06 cm)
 - Weight: 7.05 lbs (3.20 kg)

REALPORT SOFTWARE

- Local emulation of UNIX TTY and Microsoft COM ports
- Transparent printing under UNIX
- Single TCP/IP connection per PortServer reduces Ethernet traffic and minimizes host CPU utilization
- RealPort with encryption provides security

REGULATORY APPROVALS

- PortServer TS 8, PortServer TS 8/16 MEI**
- FCC Part 15, Subpart B, Class A
 - EN55022, Class A
 - EN55024
 - EN61000-3-2,3
 - UL60950
 - CAN/CSA C22.2 No. 60950
 - EN60950

- PortServer TS 16**
- FCC Part 15, Subpart B, Class B
 - EN55022, Class B
 - EN55024
 - EN61000-3-2,3
 - UL60950
 - CAN/CSA C22.2 No. 60950
 - EN60950

POWER REQUIREMENTS

- PortServer TS 8**
- External, 100-240VAC, 50/60 Hz, 6 W typ.
- PortServer TS 16 desktop and rack, PortServer TS 8/16 MEI**
- Internal, 100-250VAC, 50/60 Hz, 12 W typ.
- PortServer TS 16 48VDC**
- Internal 36-72VDC, 12 W typ.
- PortServer TS 8 48VDC**
- External 36-72VDC, 6 W typ.

ENVIRONMENTAL

- Operating temperature: 0° C to 55° C (32° F to 130° F)
- Relative humidity: 5% to 95% (non-condensing)
- Serial Port Protection (ESD): +15 kV human body model

MODEL.....PART NUMBERS

Model	North America	International
PortServer TS 8 - RS-232	70001734	70001741
PortServer TS 8 MEI - RS-232/422/485, 19" rack mountable	70001979	70001981
PortServer TS 8, 48VDC - RS-232, DC power	70001885	70001885
PortServer TS 16 - RS-232	70001733	70001738
PortServer TS 16 MEI - RS-232/422/485, 19" rack mountable	70001978	70001980
PortServer TS 16 Rack - RS-232, 19" rack mountable	70001742	70001743
PortServer TS 16 Rack, 48VDC - RS-232, DC power, 19"/23" rack mountable	70001747	70001747
PortServer TS 16 Enterprise Rack - RS-232, 19" rack mountable	70001928	70001929

See <http://www.digi.com> for additional cable converters.

DIGI PORT AUTHORITY-REMOTE

- Remote monitoring application
- Ports status
- Ethernet status



DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

Digi International

11001 Bren Road E.
Minnetonka, MN 55343
U.S.A.
PH: 877-912-3444
952-912-3444
FX: 952-912-4952
email: info@digi.com

Digi International France

31 rue des Poissonniers
92200 Neuilly sur Seine
PH: +33-1-55-61-98-98
FX: +33-1-55-61-98-99
www.digi.fr

Digi International KK

NES Building South 8F
22-14 Sakuragaoka-cho,
Shibuya-ku
Tokyo 150-0031, Japan
PH: +81-3-5428-0261
FX: +81-3-5428-0262
www.digi-intl.co.jp

Digi International (HK) Limited

Suite 1703-05, 17/F.,
K Wah Centre
191 Java Road
North Point, Hong Kong
PH: +852-2833-1008
FX: +852-2572-9989
www.digi.cn

Digi International, the leader in device networking for business, develops reliable products and technologies to connect and securely manage local or remote electronic devices over the network or via the web. With over 20 million ports shipped worldwide since 1985, Digi offers the highest levels of performance, flexibility and quality.

www.digi.com

WHEN
RELIABILITY
MATTERS™

© 1999-2008 Digi International Inc.

All rights reserved. Digi, Digi International, the Digi logo, the When Reliability Matters logo, PortServer and RealPort are either trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. Microsoft, Windows and the Windows logo are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. All other trademarks are the property of their respective holders.

91000912
D2/308

